

**ALBED**  
M I L A N O 1 9 6 4

**TECHNICAL BOOK**  
**Pull opening door flush with the wall**  
**RING**

PRODUCT'S CARD N° RG3

Product and legal denomination: SWING DOORS FOR INTERIORS  
Commercial name: RING

Typology: ALUMINIUM AND WOOD

PRODUCTS' COMPONENTS	USED MATERIALS
METAL PARTS	Jamb in profiled aluminium UNI 3569. Finishing: brushed anodized UNI 10681.
WOOD PARTS	Honeycomb door th. 38 mm finishing RAL lacquered.
GASKETS AND OTHER ACCESSORIES	Rubber gasket. Hinges in steel and zama.
POSSIBLE HARMFUL SUBSTANCES TO HEALTH	None.
ORDINARY MAINTENANCE	Clean with a soft cloth, slightly dampened and free from products containing solvent and/or abrasive material.
WARNINGS	The assembly must be made only by expert people.

These cards of certification of the product comply with all what the law n.206 del 06.09.2005 prescribes.

DELMONTE S.R.L IS CERTIFIED WITH THE MANAGEMENT SYSTEM FOR THE QUALITY ACCORDING TO UNI EN ISO 9001:2000, FOR THE ACTIVITY OF PLANNING AND PRODUCTION OF DOORS FOR INTERIORS, FURNISHINGS AND COMPLEMENTS FURNITURE IN ALUMINIUM.



JAMB

---

Aluminium

Steel




WOODEN DOOR

---

Lacquered :

RAL lacquered



Handle :


Black

White




DOOR FLUSH WITH THE WALL TO PULL


JAMB INTO THE WALL

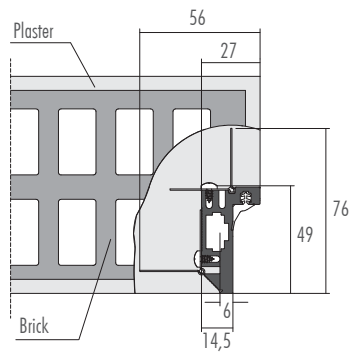


JAMB INTO PLASTERBOARD

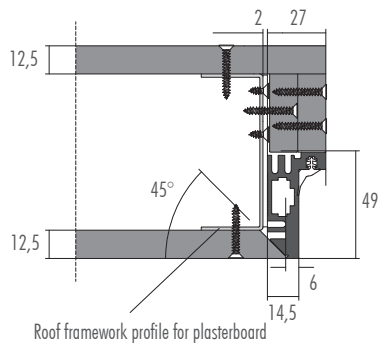



HINGE'S REGULATION

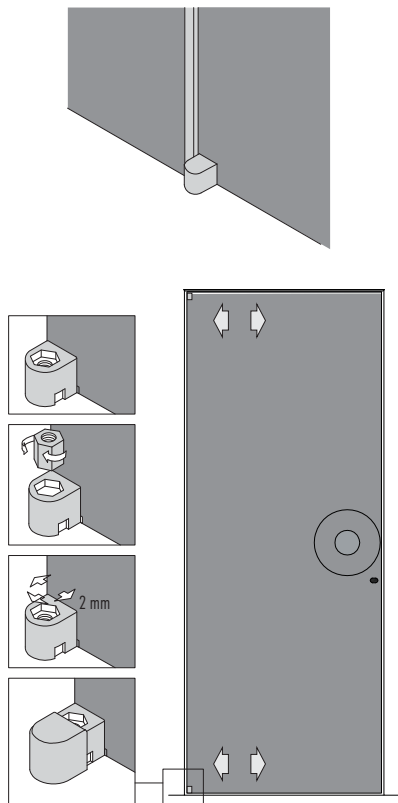




COMPONENTS' LIST

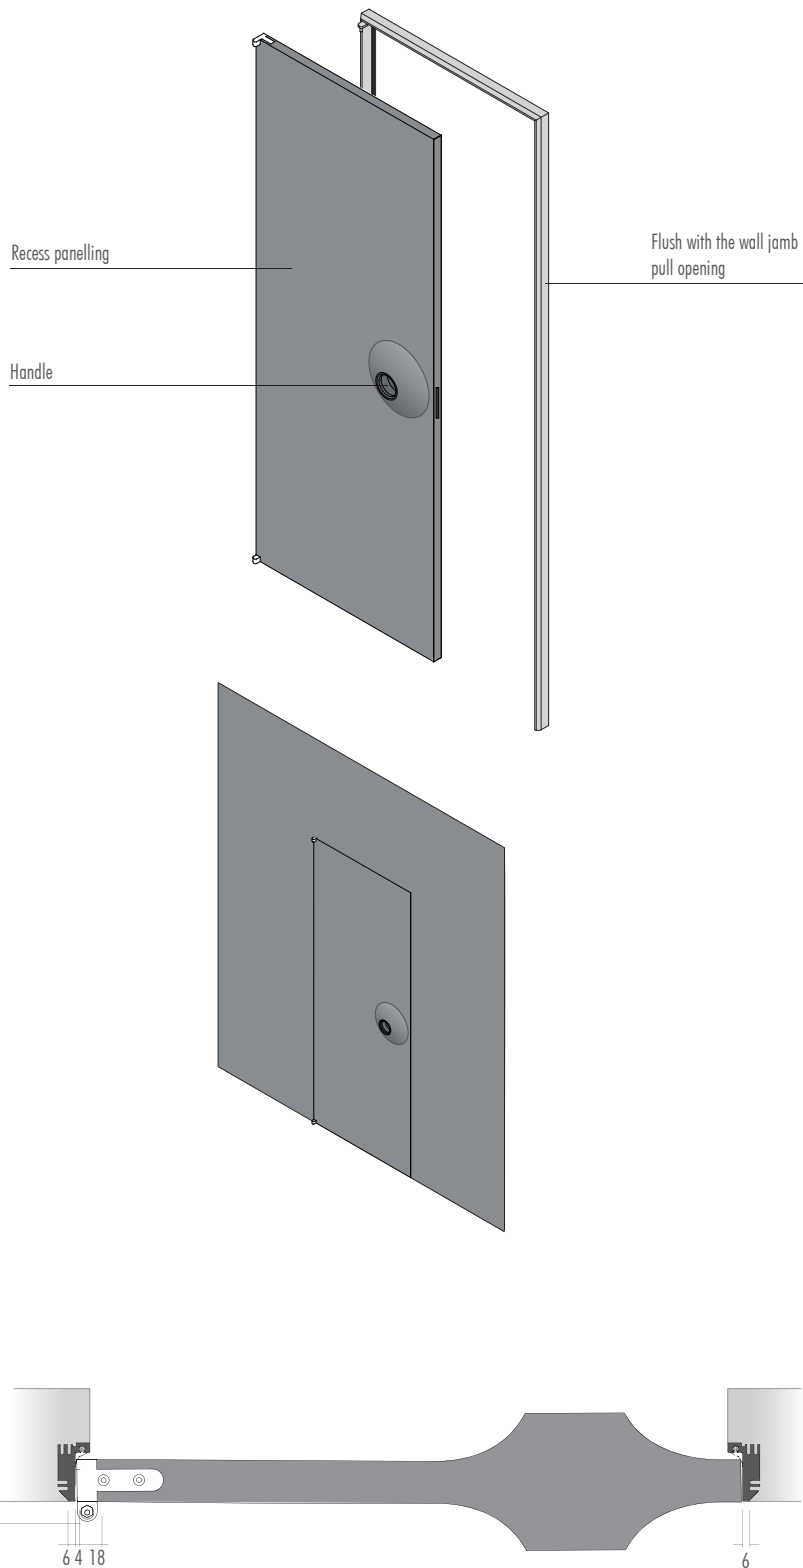



LEFT PULL OPENING

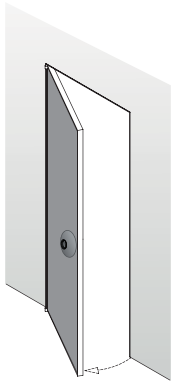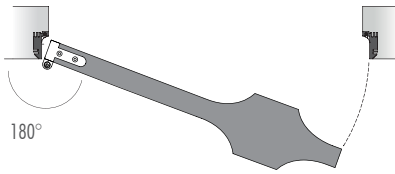

RIGHT PULL OPENING

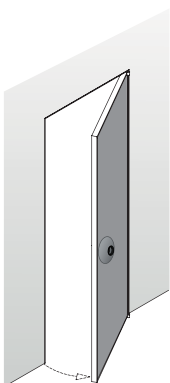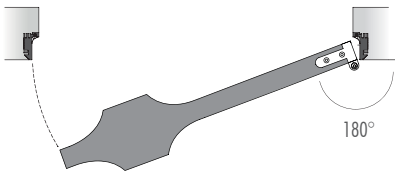


ORDER INSTRUCTIONS

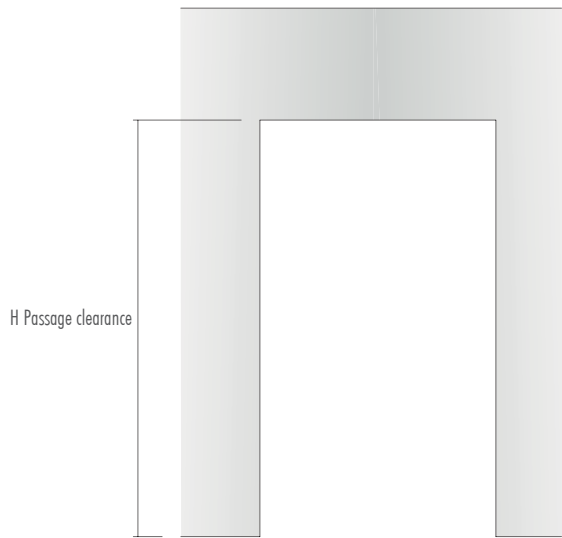


ORDER INSTRUCTIONS

- 1) Specify if the frame is applied into the wall or into the plasterboard
- 2) Door opening direction specify: (right) (left)
- 3) Door (including jambs for the installation) order
- 4) Order separately the lock (with latch or key)

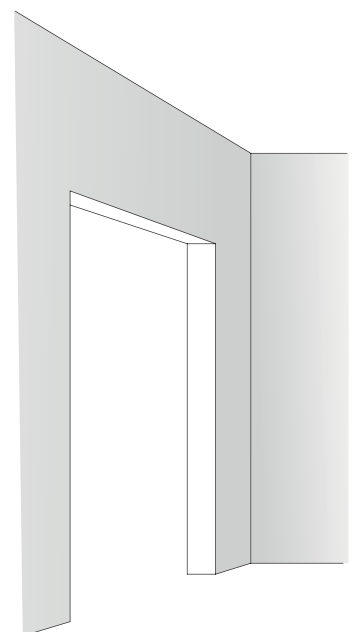


DOOR FLUSH WITH THE WALL TO PULL: BUILDING INTO THE WALL


DETAIL

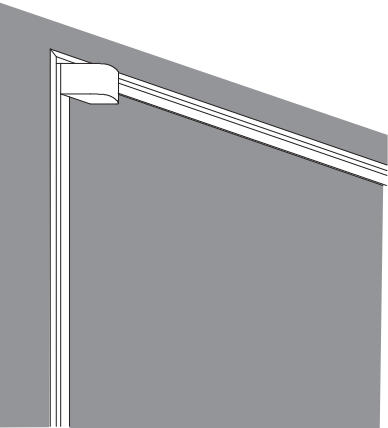



JAMB

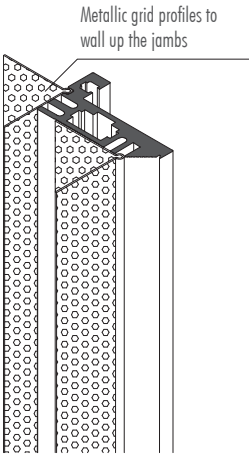

FIXATION INTO WALL

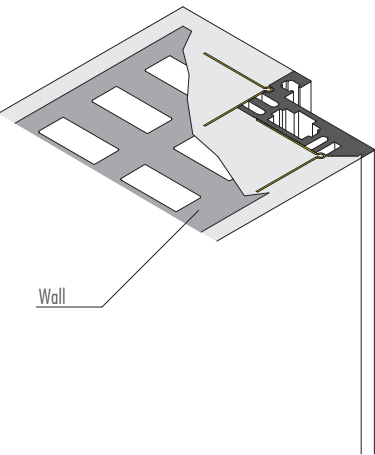


FLUSH SWING DOOR

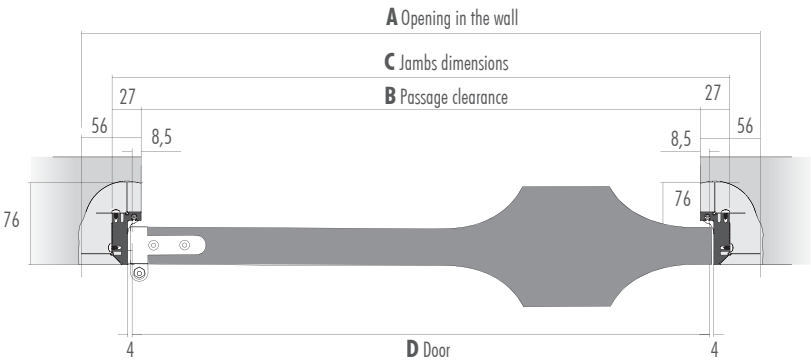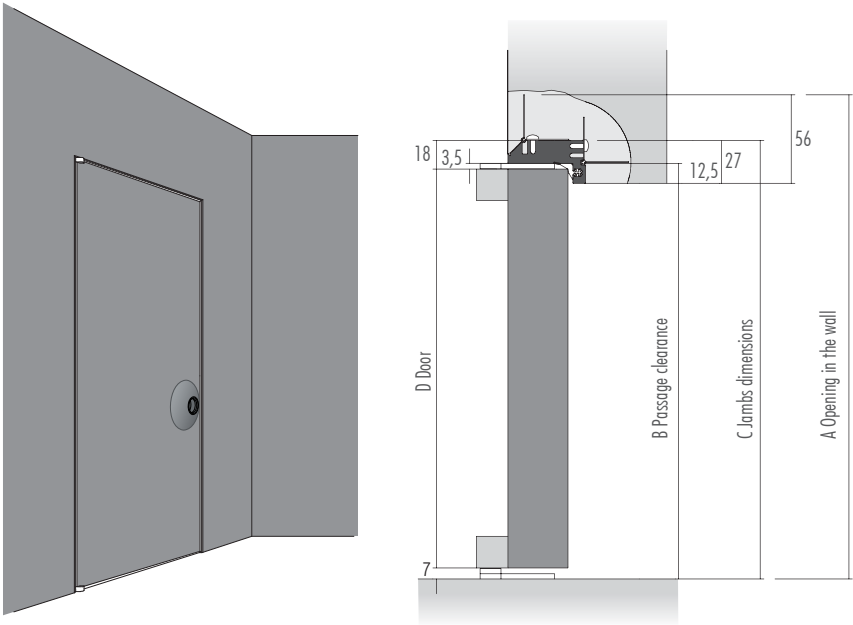


	A Opening in the wall		B Passage clearance		C Jamb dimensions		D Door dimensions	
Standard door	728	2169	616	2113	670	2140	633	2115
	828	2169	716	2113	770	2140	733	2115
	928	2169	816	2113	870	2140	833	2115
Custom made doors	max 1028	max 2754	916	2698	970	2725	933	2700

DETAIL

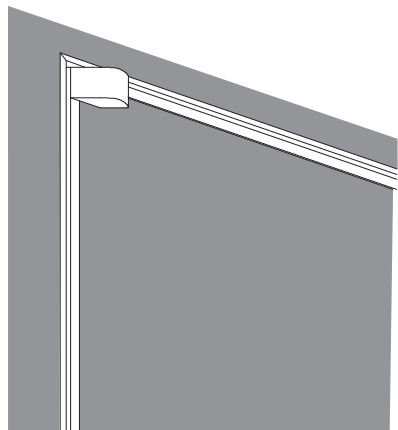


JAMB




Fixing brackets of the jambs  
on the plasterboard



FIXATION INTO PLASTERBOARD

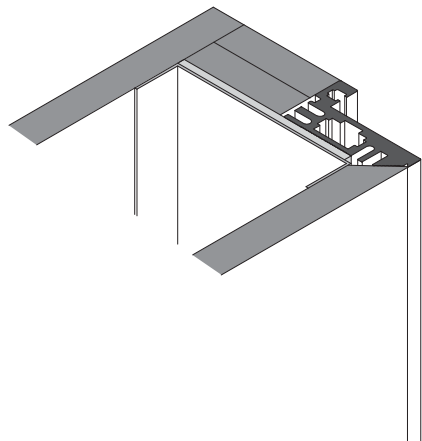


FLUSH SWING DOOR

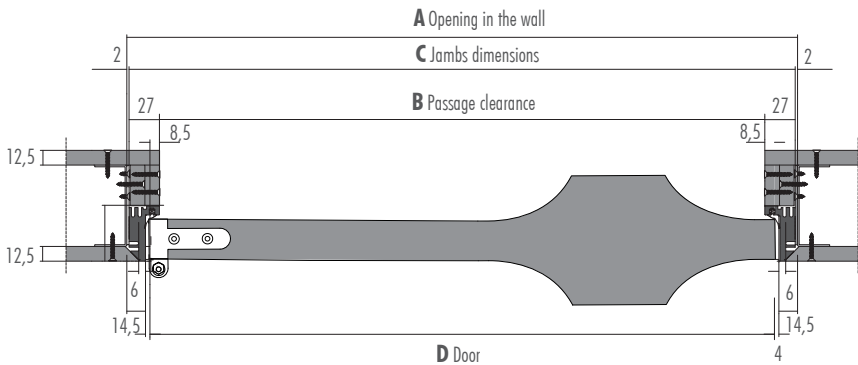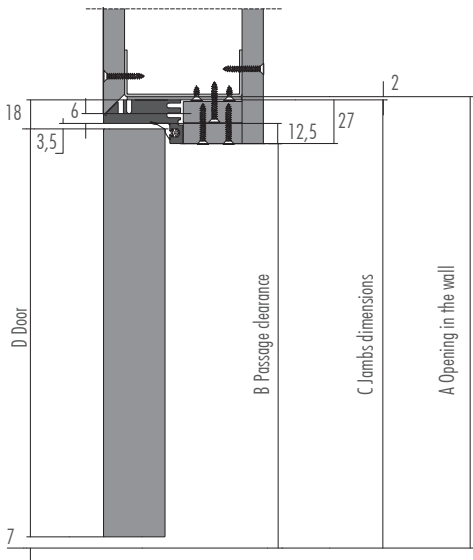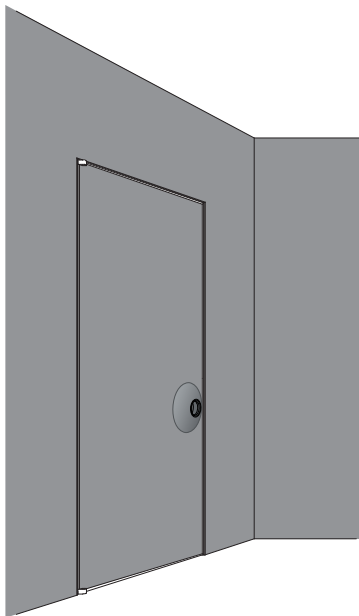

	A Opening in the wall		B Passage clearance		C Jambs dimensions		D Door dimensions	
	Width	Height	Width	Height	Width	Height	Width	Height
Standard door	674	2142	616	2113	670	2140	633	2115
	774	2142	716	2113	770	2140	733	2115
	874	2142	816	2113	870	2140	833	2115
Custom made doors	max 1028	max 2727	916	2698	970	2725	933	2700


## DOOR FLUSH WITH THE WALL TO PULL

### JAMB INTO THE WALL

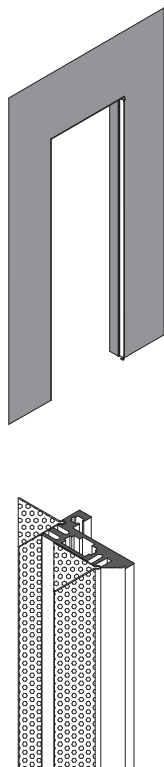


### FIXATION INTO WALL

The jambs are covered with a protective pellicle and furnished assembled with a stiffening panel which makes easier the laying and will be removed in a second moment.

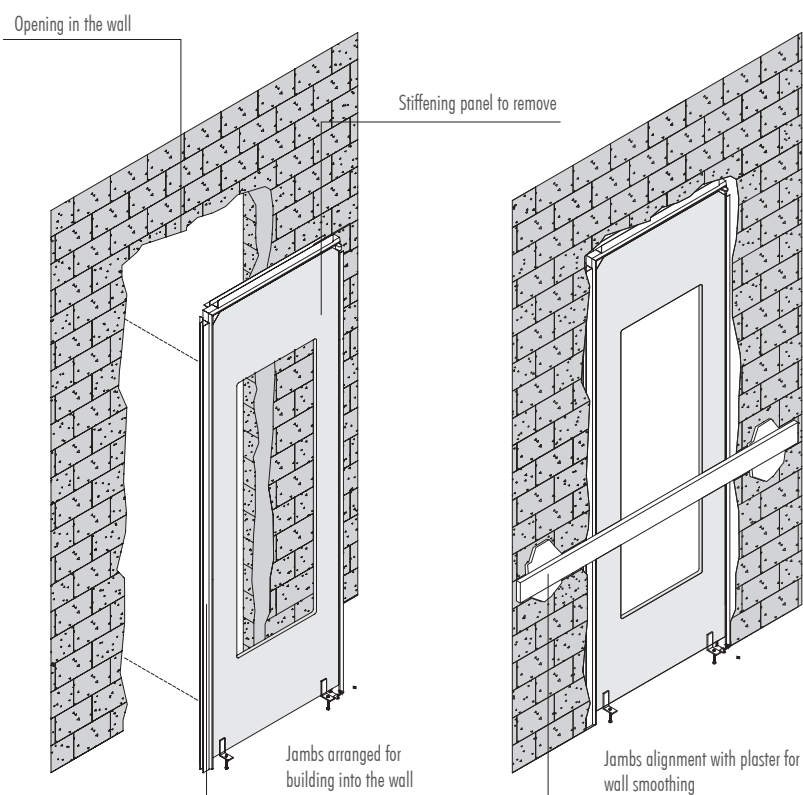

### JAMB INTO PLASTERBOARD

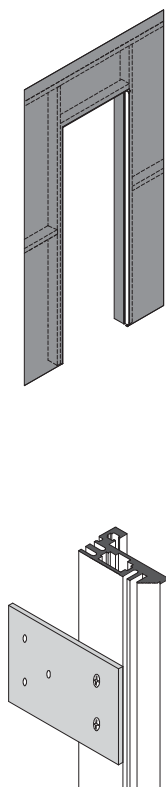

### FIXATION INTO PLASTERBOARD

